PP CORRUGATED CONDUIT

TECHNICAL DATA SHEET | SPLIT & NON-SPLIT

On1shelf

Digital Isle Limited

sales@digitalisle.co.uk

PRODUCT SPECIFICATION


Material	Polypropylene (PP)
Construction	Corrugated; split or non-split
Colours	Black, natural, red, yellow, blue, green
Temperature	-10°C to +90°C (reference range only)
Application	Cable routing, bundling and mechanical protection

VERSION / INGRESS PROTECTION

Non-split: IP65 - non-split version only.

Split: longitudinal opening for fitting around existing cables; no IP65 claim.

ORIGINAL DIMENSION DRAWING

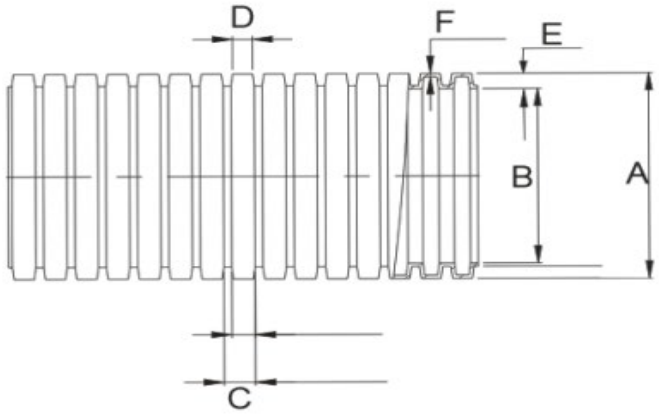

A-F correspond to the dimensions below. Drawing not to scale.

DIMENSIONS

All dimensions in mm | Tolerance: +/-0.2 mm

Item	Description	Outer dia. A	Inner dia. B	C	D	E	F
6.2 mm	PP; split / non-split	9.2	6.2	2.5	1.8	1.2	0.3
10 mm	PP; split / non-split	13.5	10	3.0	2.0	1.3	0.3
13 mm	PP; split / non-split	15.8	12.7	3.5	2.0	1.8	0.3
15 mm	PP; split / non-split	20	15.5	3.5	2.5	2.2	0.4
19 mm	PP; split / non-split	23.5	19	3.5	2.5	2	0.4
23 mm	PP; split / non-split	28	23	3.5	2.5	2.6	0.4

Temperature shown is a published benchmark for comparable PP conduit, not a verified rating for this product.